

DIMENSIONS & DETAILS

Cavity

Module Size	7 3/4" W x 7 3/4" L x 1 13/16" H (198mm W x 198mm L x 46 mm H)
Cable Raceway Capacity	6" W x 1 13/16" H (152mm W x 46mm H) 196 CAT5e cables per raceway

System Dead Load

Weight	6.05 lbs per square foot 29.54 kg per square meter
--------	---

Floor Tiles

Tile Size	24" x 24" (610mm x 610mm)
Tile Dimensions	23 7/8" W x 23 7/8" L x 7/8" D (607mm W x 607mm L x 21mm D)
Tile Weight	21.5 lbs (9.75 kgs) each

Steel Supports

Support Height	2 5/8" (67mm) to bottom of carpet
Floor Cavity Height	1 13/16" (46mm) base to underside of tile
Component Size:	5 1/4" diameter x 1 11/16" H (133mm diameter x 43mm H) 4" (102mm) diameter top

Webbing

Webbing Size	24" x 24" (610mm x 610mm) 1/8" (2.5mm) thick (typical)
Inc. Connector	36" x 36" (915mm x 915mm)

Pad Nuts

Pad Nut Size	4" diameter x 1/16" thick (102mm diameter x 1.6mm thick)
--------------	---

Screw & Washer Assembly

Washer Size	1 1/2" diameter x 1/16" thick (38mm diameter x 1.6mm thick)
Philips Screw	1/4" x 2" long (6.3mm x 50mm long)

Perimeter Blocking

Blocking Size	2 9/16" H x 1 13/16" W x 19'-0" L (64mm H x 46mm W x 5791mm L)
---------------	---

Perimeter Fasteners

Philips Screw	1/4" x 2 1/4" long (6.3mm x 57mm long)
---------------	--

COMPONENTS & MATERIALS

Floor Tiles

MgO Board (Magnesium Oxide Board)

Supports

20 gauge (0.81 mm) stamped steel
Zinc plated to prevent corrosion

Webs and Pad Nuts

V-0 Polypropylene
Colour: White
Quick Connect System

Screw and Washer Assemblies

Steel, zinc plated

Perimeter Blocking

Aluminium, extruded, clear anodised

Perimeter Fasteners

Steel, black phosphate finish

DIMENSIONS & DETAILS

Cavity

Module Size	7 3/4" W x 7 3/4" L x 1 13/16" H (198mm W x 198mm L x 46 mm H)
Cable Raceway Capacity	6" W x 1 13/16" H (152mm W x 46mm H) 196 CAT5e cables per raceway

System Dead Load

Weight	6.05 lbs per square foot 29.54 kg per square meter
--------	---

Floor Tiles

Tile Size	24" x 24" (610mm x 610mm)
Tile Dimensions	23 7/8" W x 23 7/8" L x 7/8" D (607mm W x 607mm L x 21mm D)
Tile Weight	21.5 lbs (9.75 kgs) each

Steel Supports

Support Height	2 5/8" (67mm) to bottom of carpet
Floor Cavity Height	1 13/16" (46mm) base to underside of tile
Component Size:	5 1/4" diameter x 1 11/16" H (133mm diameter x 43mm H) 4" (102mm) diameter top

Webbing

Webbing Size	24" x 24" (610mm x 610mm) 1/8" (2.5mm) thick (typical)
Inc. Connector	36" x 36" (915mm x 915mm)

Pad Nuts

Pad Nut Size	4" diameter x 1/16" thick (102mm diameter x 1.6mm thick)
--------------	---

Screw & Washer Assembly

Washer Size	1 1/2" diameter x 1/16" thick (38mm diameter x 1.6mm thick)
Philips Screw	1/4" x 2" long (6.3mm x 50mm long)

Perimeter Blocking

Blocking Size	2 9/16" H x 1 13/16" W x 19'-0" L (64mm H x 46mm W x 5791mm L)
---------------	---

Perimeter Fasteners

Philips Screw	1/4" x 2 1/4" long (6.3mm x 57mm long)
---------------	--

COMPONENTS & MATERIALS

Floor Tiles

MgO Board (Magnesium Oxide Board)

Supports

20 gauge (0.81 mm) stamped steel
Zinc plated to prevent corrosion

Webs and Pad Nuts

V-0 Polypropylene
Colour: White
Quick Connect System

Screws and Washers

Steel, zinc plated

Perimeter Blocking

Aluminium, extruded, clear anodised

Perimeter Fasteners

Steel, black phosphate finish

INSTALLATION

Suitable for installation over existing sub-floors - Floor webbing follows contour of sub-floor with no leveling capabilities. Below is an example of the number of components required for a floor with dimensions of 26' x 23' (7.92m x 7.01m)

Tiles

150 tiles required

Webs

7 boxes (A box contains 10 units)

Steel Supports

630 units (Delivered in place with the webbing)

Pad Nuts

630 units (Delivered in place with the webbing)

Screws and Washers

3 packs of each. (A pack contains 100 pieces)

Perimeter Blocking

6 lengths required

Perimeter Fasteners

Two per perimeter tile minimum
Quantity dependant on room size and layout

DIMENSIONS & DETAILS

Cavity

Module Size	7 3/4" W x 7 3/4" L x 1 13/16" H (198mm W x 198mm L x 46mm H)
Cable Raceway Capacity	6" W x 1 13/16" H (152mm W x 46mm H) 196 CAT5e cables per raceway

System Dead Load

Weight	6.05 lbs per square foot 29.54 kg per square meter
--------	---

Floor Tiles

Tile Size	24" x 24" (610mm x 610mm)
Tile Dimensions	23 7/8" W x 23 7/8" L x 7/8" D (607mm W x 607mm L x 21mm D)
Tile Weight	21.5 lbs (9.75 kgs) each

Steel Supports

Support Height	2 5/8" (67mm) to bottom of carpet
Floor Cavity Height	1 13/16" (46mm) Base to underside of tile
Component Size:	5 1/4" diameter x 1 11/16" H (133mm diameter x 43mm H) 4" (102mm) diameter top

Webbing

Webbing Size	24" x 24" (610mm x 610mm) 1/8" (2.5mm) thick (typical)
Inc. Connector	36" x 36" (915mm x 915mm)

Pad Nuts

Pad Nut Size	4" diameter x 1/16" thick (102mm diameter x 1.6mm thick)
--------------	---

Screw & Washer Assembly

Washer Size	1 1/2" diameter x 1/16" thick (38mm diameter x 1.6mm thick)
Philips Screw	1/4" x 2" long (6.3mm x 50mm long)

Perimeter Blocking

Blocking Size	2 9/16" H x 1 13/16" W x 19'-0" L (64mm H x 46mm W x 5791mm L)
---------------	---

Perimeter Fasteners

Philips Screw	1/4" x 2 1/4" long (6.3mm x 57mm long)
---------------	--


TESTING & APPROVALS

Acceptance Criteria for Fixed Height, Low Profile, Raised Floor Systems: AC151

Inclusive of the following tests: ASTM D 635, ASTM D 1929, ASTM D 2843-99, ASTM E 84, ASTM E 119, ASTM E 2322-03

Los Angeles Research Report (General) LARR-25858


Testing Reports, Details and Approvals are available upon request.

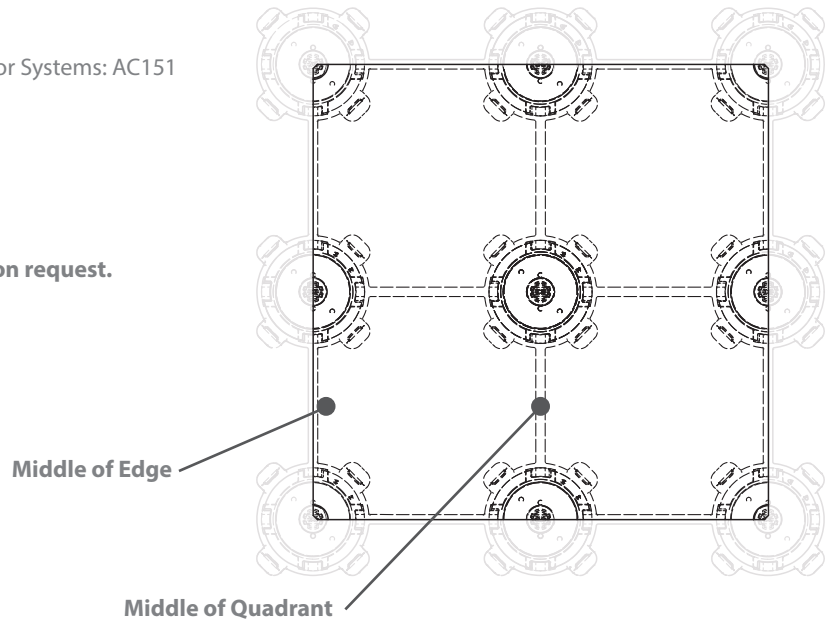

CISCA Test Results					
Property	Test no.	Location	Ultimate Load		Ultimate Failures
			lbf	kgf	
CISCA Section 1 Concentrated Load	1	Middle of Quadrant	897	406.9	Indentor depressed into panel
		Middle of Edge	623	282.6	3" x 7" (76.2 x 177.8mm) section broke off edge
	2	Middle of Quadrant	890	403.7	Board cracked
		Middle of Edge	590	267.6	1" x 2" (25.4 x 50.8mm) section broke off edge
	3	Middle of Quadrant	881	399.6	Indentor depressed into panel
		Middle of Edge	567	257.2	1" x 1" (25.4 x 25.4mm) section broke off edge
	4	Middle of Quadrant	860	390.1	Indentor cracked panel
		Middle of Edge	600	272.2	1" x 1" (25.4 x 25.4mm) section broke off edge
	5	Middle of Quadrant	887	402.3	Panel cracked parallel to edge at indentor
		Middle of Edge	573	259.9	1" x 1" (25.4 x 25.4mm) section broke off edge

ICC-ES AC151 Test Results				
Property	Test no.	Load		Observations
Uniform Load	1	900 psf	4394.2 kg/m ²	No sign of damage
	2	900 psf	4394.2 kg/m ²	No sign of damage
	3	900 psf	4394.2 kg/m ²	No sign of damage
	4	900 psf	4394.2 kg/m ²	No sign of damage
	5	900 psf	4394.2 kg/m ²	No sign of damage
Concentrated Load Over 2 ft x 2ft / 609.6 x 609.6mm	1	10127 lbf	4594 kgf	No sign of damage
	2	10127 lbf	4594 kgf	No sign of damage
	3	10127 lbf	4594 kgf	No sign of damage
	4	10127 lbf	4594 kgf	No sign of damage
	5	10127 lbf	4594 kgf	No sign of damage

ISOMETRIC VIEW

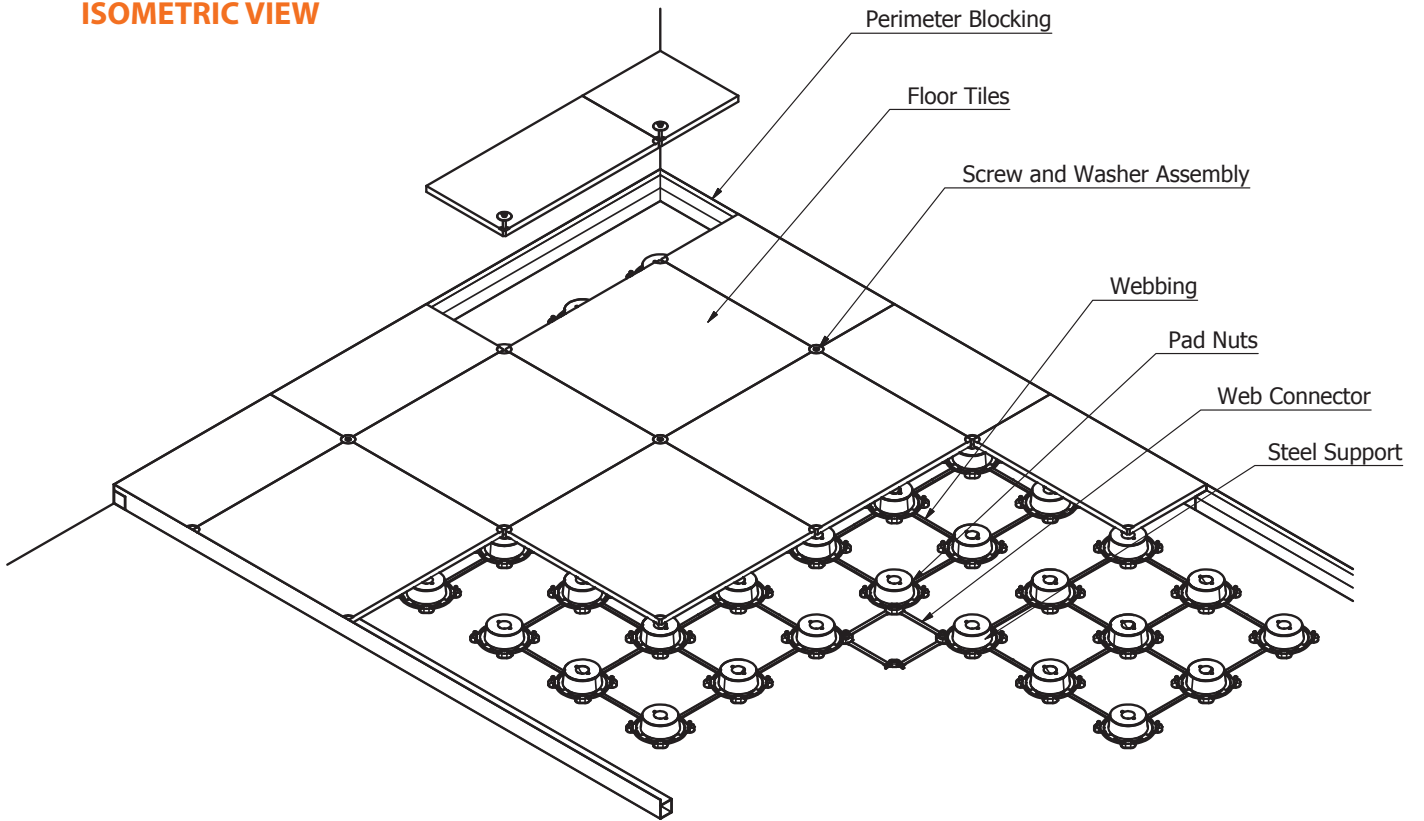

SECTION VIEW

